


GET PRIZE-WINNING PICTURES WITH GRAFLEX

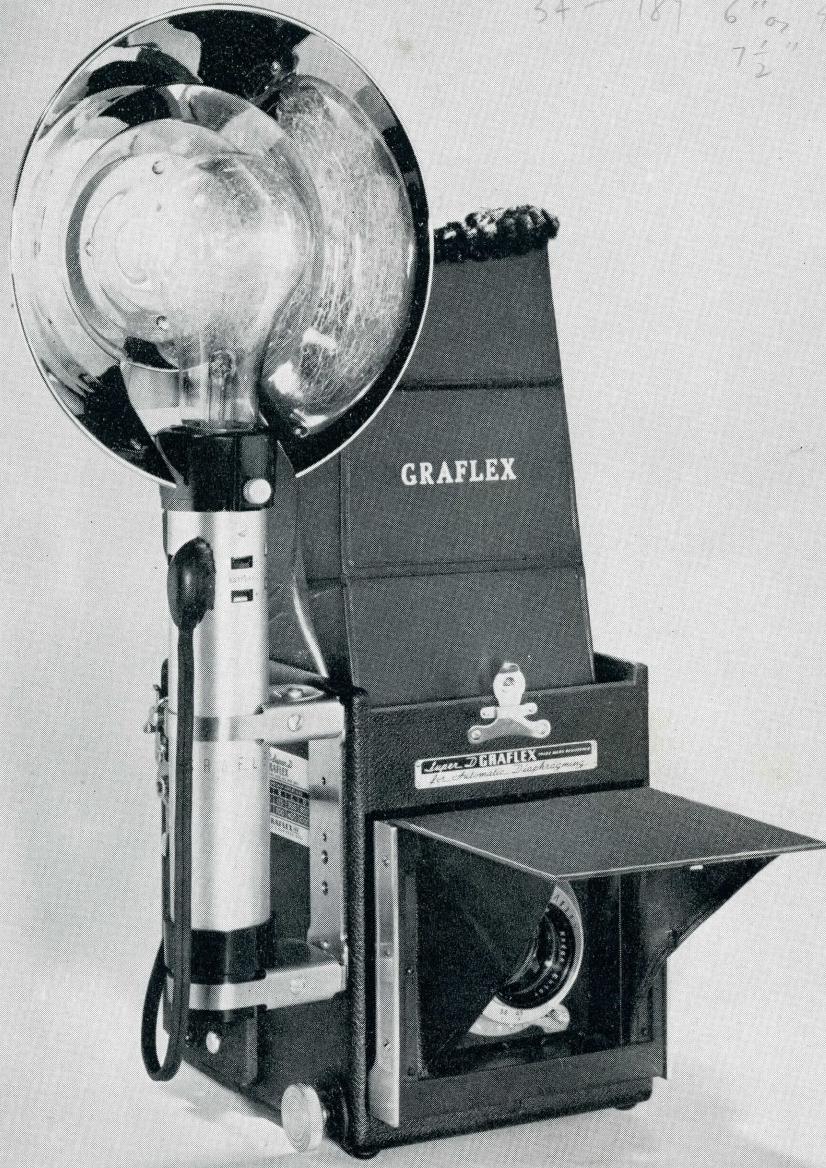

45 - 199 ⁸
34 - 189 6" or 4.5
7¹/₂" 5.6

THE STEWART'S CAMERA SHOP
822 - 14TH ST., N. W.
WASHINGTON 5, D.C.

Super D
GRAFLEX

This precision-built, all purpose camera offers you all these advantages:

- ★ *A SINGLE LENS SYSTEM FREE OF PARALLAX*
- ★ *FULL VISION GROUND-GLASS FOCUSING*
- ★ *AUTOMATIC DIAPHRAGM*
- ★ *SIMPLIFIED FOCAL-PLANE SHUTTER*
- ★ *WIDE INTERCHANGEABILITY OF LENSES*
- ★ *REVOLVING BACK*
- ★ *BUILT-IN FLASH SYNCHRONIZATION*
- ★ *INTERCHANGEABLE FILM ATTACHMENTS*
- ★ *AVAILABLE IN TWO PICTURE SIZES: $3\frac{1}{4} \times 4\frac{1}{4}$ OR 4x5*

Super D


Designed to highest professional standards, the Super D Graflex is an unusually fine camera of exceptional utility. Ideally suited to fine portraiture, pictures of children, pets, and scenic work where composition and other pictorial factors are of first importance, the Super D Graflex is top choice with outstanding professional photographers. Industrial and commercial photographers, as well as scientists and explorers, have demonstrated the unsurpassed capabilities of the Super D.

GRAFLEX Automatic Diaphragm and full-vision, right-side-up ground glass focusing, enables you to see your picture, composed and brilliant, right up to the moment you take it. Both subject and photographer have full freedom of movement. As the picture is taken, the diaphragm smoothly and automatically returns to the pre-determined setting for the correct exposure and depth of field. This requires no separate action on the part of the photographer.

IMPORTANT FEATURES


The crisp Ektar coated lens is easily and quickly interchangeable with telephoto lenses having focal lengths up to 10 and 15 inches. The new simplified focal-plane shutter gives eight speeds, up to 1/1000 of a second. Built-in flash synchronization may be used with "long peak" flash bulbs at instantaneous shutter speeds of 1/1000, 1/400, or 1/200 in the $3\frac{1}{4} \times 4\frac{1}{4}$ size. (Because of the larger film area and larger curtain opening of the 4x5 model, in relation to the duration of peak of flash of the lamps, only the 1/1000 instantaneous setting is synchronized on the 4x5 model.) If the shutter is set at the "drop curtain opening," proper synchronization is afforded with short peak flash lamps and high-speed electronic flash units in the case of both sizes of the Super D.

Other advantages of the Super D Graflex include a revolving back for either vertical or horizontal pictures without changing the position of the camera; interchangeable film receptacles permitting use of sheet film, film packs or plates, and rapid change from black-and-white to color.

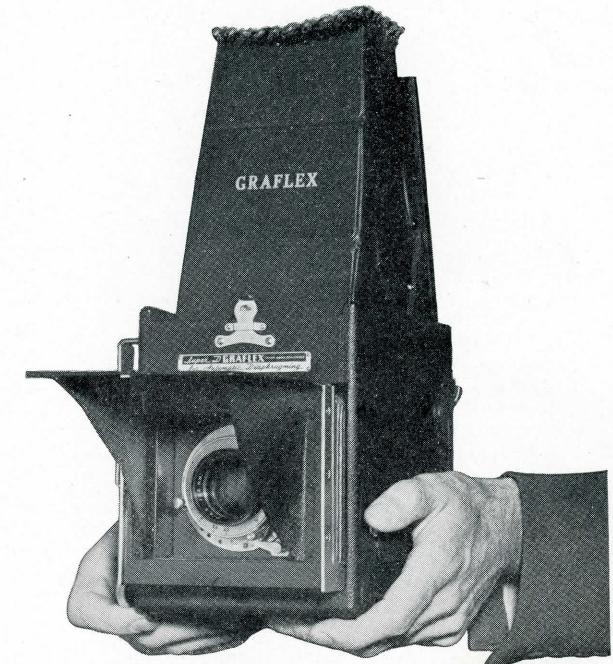


Here are special GRAFLEX features



- As you look into the focusing hood you see on the ground glass, at full aperture, a brilliant reflected image of the subject, right side up, full picture size—up to the instant of exposure.
- When you see the picture you want and the focus is sharp, press the shutter release. The diaphragm automatically closes to its pre-set aperture, the mirror (3) swings up out of the way and releases the focal-plane shutter, thus recording on film the exact picture you saw on the ground glass.
- Focusing is under convenient, positive control to the very instant of exposure.
- Superior lens gathers ample light for the focal-plane shutter, which transmits appreciably more light than does any other type of shutter. Since the lens through which you focused is the lens which makes the picture, it entirely eliminates any problem of parallax.

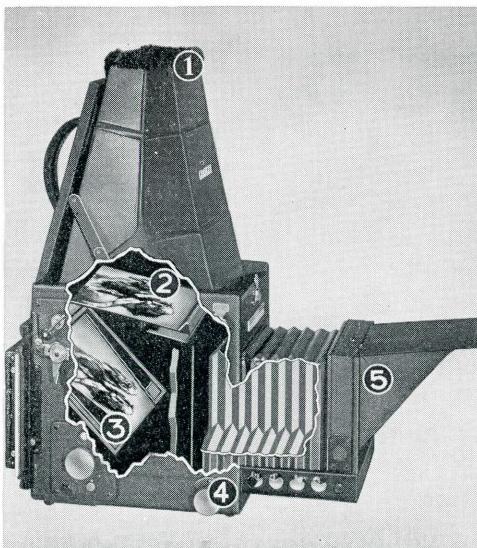


REVOLVING BACK enables you to quickly change the film position—without moving the camera—for horizontal or vertical pictures. New style Slide Locks on the camera back move inward at an angle, assuring correct fitting of all Grafex film and plate attachments of early or current design.

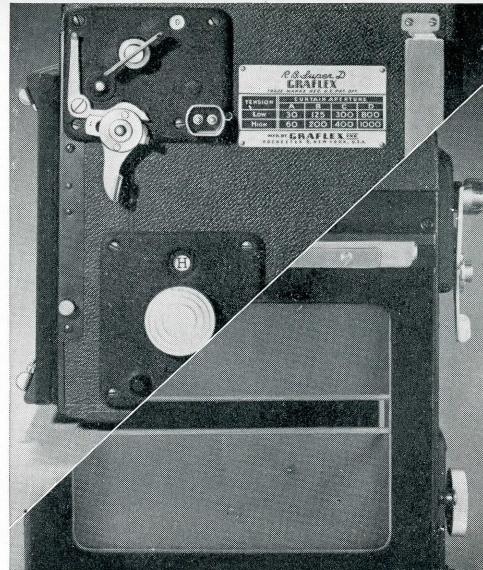

FOCAL-PLANE SHUTTER. The simplified focal-plane shutter of the Super D Grafex provides eight speeds 1/30, 1/60, 1/125, 1/200, 1/300, 1/400, 1/800, 1/1000—plus $\frac{1}{5}$ (drop curtain) and "Time" together with rugged construction, more accurate exposure than is possible with other types of shutters.

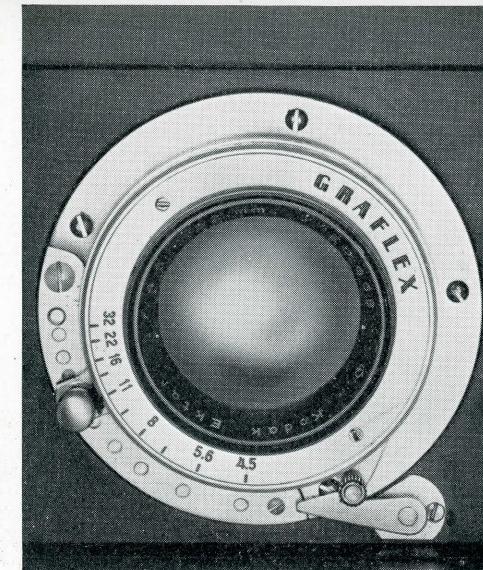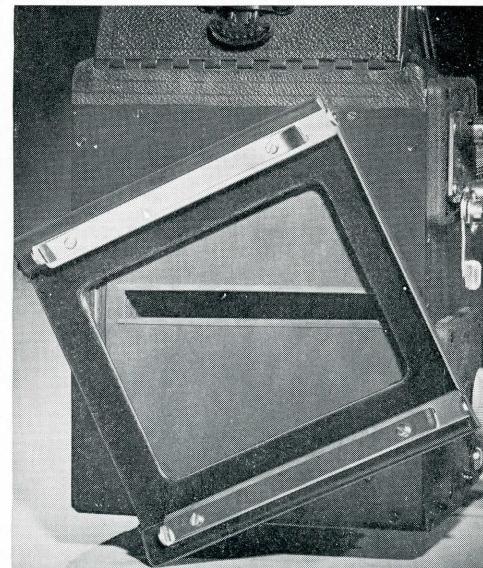


AUTOMATIC DIAPHRAGM of the Super D Grafex which permits focusing with the lens wide open, and then automatically stops down to a pre-selected aperture while the mirror is rising before exposure. Accurate focusing is thus made more rapid and certain—up to the moment of exposure.

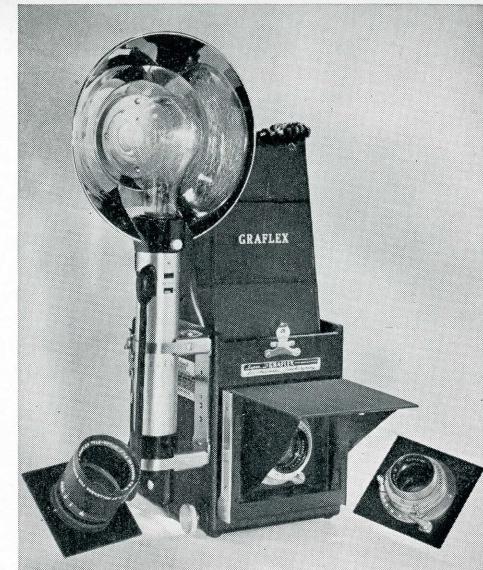


INTERCHANGEABLE LENSES. Different lenses in both standard barrel mounts and in automatic diaphragm mounts are completely and quickly interchangeable in the Super D Grafex, no special adjustments being needed. Left of above 3 1/4 x 4 1/4 camera, 10" Tele-Optar; right, 6" lens; on camera, 7 1/2" lens.



BLACK-AND-WHITE OR COLOR. With the Super D Grafex it is possible to change quickly from black-and-white to color film with a minimum of time and effort. Furthermore, you enjoy the added convenience of not needing to remove the film from the camera for focusing or other adjustments.

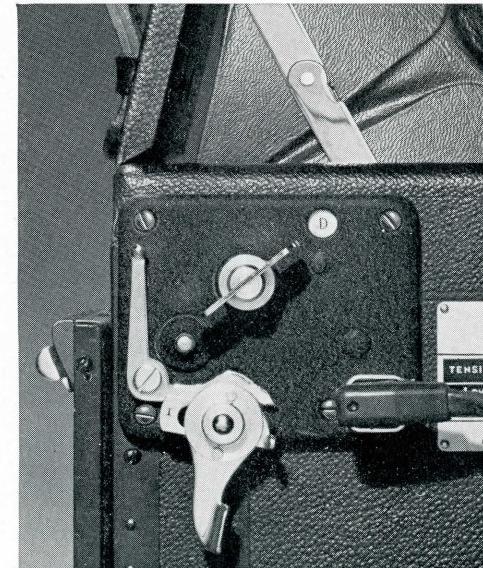

FLASH SYNCHRONIZATION greatly enhances the versatility of the Super D Grafex. Both 3 1/4 x 4 1/4 and 4 x 5 sizes provide synchronization with long peak focal-plane flash lamps, plus the "drop curtain" setting for automatic flash exposures with type "F" lamps as well as high speed flash units.

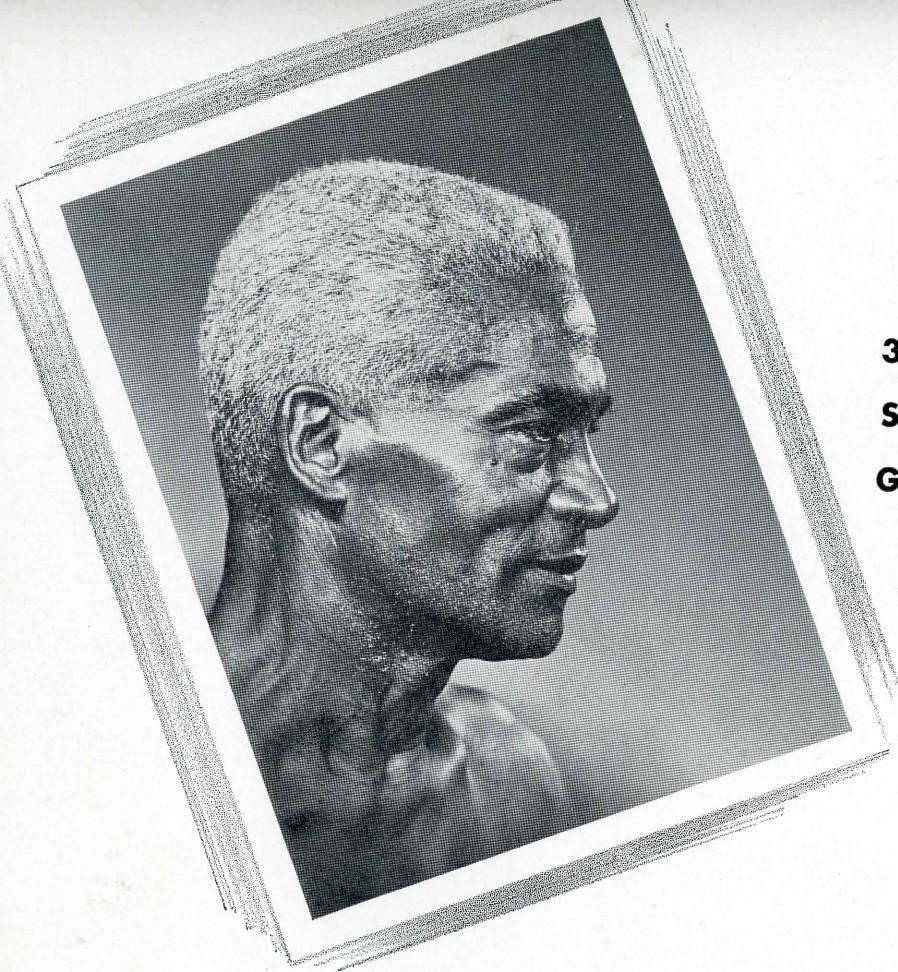

**THE
3 $\frac{1}{4}$ x 4 $\frac{1}{4}$
SUPER D
GRAFLEX**

THIS is the all-around camera for professionals, as well as serious amateurs. It means a negative of adequate size and professional quality yet economy of film cost. The 3 $\frac{1}{4}$ x 4 $\frac{1}{4}$ Super D Graflex (Catalog No. L-32) makes negatives from which contact prints of the size shown above are produced. Contact prints are satisfactory for most purposes, and excellent 8 x 10 or 11 x 14 enlargements may be easily made.

Specifications for this camera are as follows. Picture size: 3 $\frac{1}{4}$ " x 4 $\frac{1}{4}$ ". Lensboard: 3 $\frac{1}{4}$ " square. Lens regularly furnished with camera: 152mm. (6") Kodak Ektar f/4.5 with coated elements in Automatic Diaphragm. Bellows capacity: 8 $\frac{1}{4}$ ". Minimum focal length ac-

commodated: 6". Closest working distance with standard lens: 20" Simplified focal-plane shutter with eight instantaneous speeds—1/30, 1/60, 1/125, 1/200, 1/300, 1/400, 1/800, 1/1000—plus $\frac{1}{5}$ (drop curtain) and "Time." Built-in flash synchronization at 1/200, 1/400 and 1/1000 with long peak focal-plane flash lamps, plus the "drop curtain" setting for automatic open flash exposures with very short peak lamps as well as high speed flash units.

For those photographers interested in portraiture, the longer focal length 190mm. (7 $\frac{1}{2}$ ") Kodak Ektar f/5.6 lens in automatic diaphragm may be preferred. This combination (Catalog No. L-33) has a closest working distance of about 5".



THE 4 x 5 SUPER D GRAFLEX

THIS camera is "first choice" for professional use. The large picture size is favored by working photographers for all types of photography—a "two-time" enlargement affording the conventional 8 x 10 professional "print." The ease with which shots may be made straight up or down, or over the heads of a crowd, is a great advantage to many professionals. The 4 x 5 Super D Graflex (Catalog No. L-43) makes contact prints of the size shown above. Even enlargements of mural size may be satisfactorily made from its crisp, detailed negatives.


Specifications for this camera are as follows. Picture size: 4" x 5". Lensboard: 3 $\frac{1}{4}$ " square. Bellows capacity: 12". Minimum focal length accommodated: 7".

Lens regularly furnished with camera: 190mm. (7 $\frac{1}{2}$ ") Kodak Ektar f/5.6 with coated elements in automatic diaphragm. Closest working distance with standard lens: 19 $\frac{1}{2}$ ". Simplified focal-plane shutter with eight speeds—1/30, 1/60, 1/125, 1/200, 1/300, 1/400, 1/800, 1/1000—plus $\frac{1}{5}$ (drop curtain) setting and "Time." Built-in flash synchronization at 1/1000 (with back horizontal and curtain packed) with the long peak focal-plane flash lamps, plus drop curtain setting for automatic open flash exposures with type "F" flash lamps and high speed flash units. Accepts telephoto lenses with focal lengths from 14" to 17". Camera equipped with revolving back.


Accessories--
with these accessory
attachments, your
Super D GRAFLEX
becomes more
versatile and flexible.



No. 25 Graflite Unit (Cat. No. 2785) consists of a 2-cell battery case with 5" adjustable reflector for use with bayonet base flash lamps. No. 27 Model (Cat. No. 2786) consists of the 2-cell battery case with 7" reflector which accommodates medium base lamps.

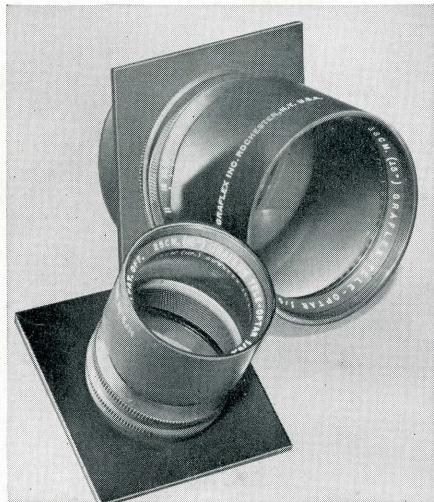

25cm (10") Grafex Tele-Optar f/5.6 lens (left) in barrel mount with elements coated, is fitted to "A" lensboard and is for use with $3\frac{1}{4} \times 4\frac{1}{4}$ Super "D". 38cm (15") Tele-Optar f/5.6 lens in barrel mount with elements coated (right), fitted to "B" board, is for use only with the 4 x 5 size camera.

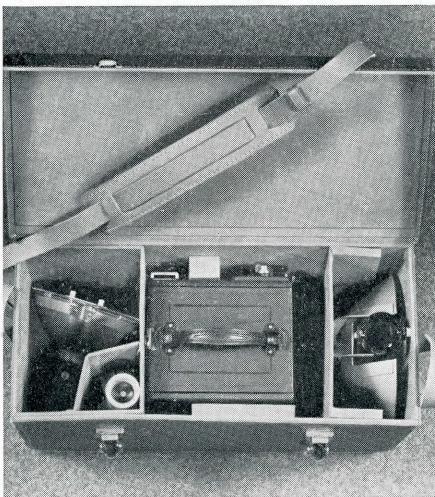

The DeLuxe Top Grain Tan Cowhide Leather Carrying Case shown above provides the ultimate in appearance, balance and camera protection. Compartments at either end accept 5" and 7" reflectors, 2-cell battery case and other accessories. $3\frac{1}{4} \times 4\frac{1}{4}$ size, Cat. No. 4138; 4 x 5 size, Cat. No. 4148.

GRAFLEX, INC. • ROCHESTER 8, N.Y., U.S.A.

